

LBB 1998/00 Plena Voice Alarm System Remote Kit

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Kit to create a remote control of the Voice Alarm Controller
- ▶ With emergency (EMG) microphone
- ▶ EMG state and fault indicators
- ▶ Control outputs for EMG and Fault state
- ▶ EN 60849 compliant

The Plena voice alarm remote control panels allow the system to be controlled remotely from one or two remote locations. There are five models available:

- The fireman's panel, which has oversized, illuminated controls and an all-call function
- The main RC unit, which duplicates the front panel of the Voice Alarm Controller
- The RC extension, which duplicates the front panel of the router
- The main RC kit
- The RC extension kit

The kits are a functional match to the remote control and the RC extension, with connectors on the front panel instead of controls and indicators.

Functions

The kit is a functional match to the LBB 1996, which duplicates the voice alarm controller. All controls and indicators are available on screw terminals. The remote control kit has BGM zone selection without source selection, volume or tone control.

These kits make it easy to build a custom control unit. The electrical connections are printed on the front and rear panels. A 24 VDC output is available to supply power to external LEDs and relays, so an external power supply is not required for that purpose.

The remote control kit functions on an external 24 V power supply. The interconnecting CAT 5 (shielded) cable provides power for the RC extension and extension kit.

After connecting all indicators the following functions are available:


- The LED meter shows the presence and level of the calls that are running in the system
- The fault indicators show detailed information of a fault in the system

The connection to the Bosch Voice Alarm System is via standard, shielded CAT 5 cable and RJ45 connectors. The included rack mounting brackets can also be used to mount the units to a rear wall with spacing for cables, and even to a flat surface above or below the units.

Certifications and approvals

Safety	acc. to EN 60065	
Immunity	acc. to EN 50130-4	
Emission	acc. to EN 55103-1	
Emergency	acc. to EN 60849	
Region	Certification	
Europe	CE	Declaration of Conformity

Installation/configuration notes

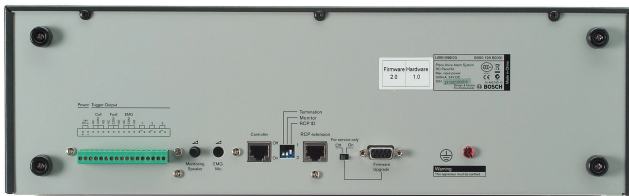

LBB 1998/00 rear view

Parts included

Quantity	Component
1	LBB 1998/00 Plena Voice Alarm System Remote Kit
1	Set of 19" mounting brackets
1	EMG microphone and cable
1	EMG microphone mounting clip
1	1 m CAT 5 cable

Technical specifications

Electrical*

Power supply	
Voltage	24 VDC, -15% / +15%
Current typical	100 mA
Current max (indicator test)	250 mA
Priority relay contacts	30 V, 1 A
Emergency relay contacts	30 V, 1 A
DC supply output	24 V, 200 mA (max)
LEDs / lamps	
On external power	50 V (200 mA max)
On internal power	5 mA max
Type	Open collector pull down

* Technical performance data acc. to IEC 60268-3

Mechanical

Dimensions	134 x 430 x 90 mm
------------	-------------------

	(19" wide, 3U high)
Weight	Approx. 3 kg
Mounting	Stand-alone, 19" rack
Color	Charcoal

Environmental

Operating temperature	-10 °C to +55 °C (14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Ordering information

LBB 1998/00 Plena Voice Alarm System Remote Kit
 Voice alarm system remote-kit, a kit for a six-zone voice alarm controller remote control.
 Order number **LBB1998/00**

Represented by:

Americas:

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com